CR-WiFi6302/04B

Encryption WiFi conference discussion unit

EncryptionWiFi conference discussion chairman unit
CR-WiFi6302B

Encryption WiFi conference discussion delegate unit
CR-WiFi6304B

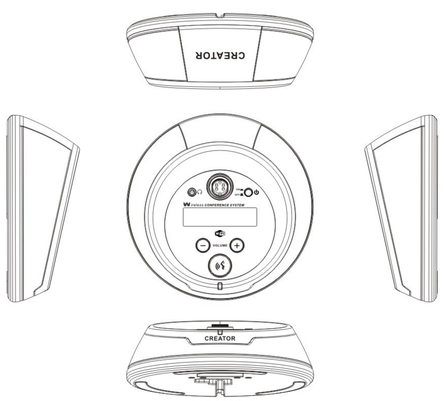

Size（mm）:
ϕ=165, H=64

Product overview

The CR-WiFi6302/4B wireless conference unit adopts special design to ensure the machine is stable and durable. It is easy to integrate with any meeting room.
The built-in antenna design; each unit is built-in with high performance battery, providing continuous speech as long as 9 hours; 13 hours of standby time; all functions of conference unit can be completed with the unit panel buttons; WiFi encryption transmission technique ensures that the speech is free from unauthorized interception.

Features

- WiFi transmission technology and strictly digital protection ensure the privacy of the meeting, to avoid malicious eavesdropping and jamming.
- The non compressed audio transmission technology, the sampling rate of 48K, 20H2-20KHZ bandwidth perfect sound.
- Using low delay technique, the output minimum delay from microphone to speaker is less than 5ms.
- Support for PC software microphone control.
- Built in with rechargeable lithium battery, the battery support 9 hours of continuous speech or 13 hour static standby.
- Built in magnetic loudspeaker.
- Work with the CREATOR HD camera tracking controller and HD infrared automatic camera to support mobile camera tracking.
- The chairman has priority control.
- Support a variety of conference modes like FIFO, APPLY, NORMAL.
- Support the sign function.

Specifications

The parameter name	CR-WiFi6302/04B
Maximum power consumption	2. 6W
Connected component Bottom	Basement for pluggable microphone
Earphone jack	3 5mm (0.14 inches)Stereo headphone jack
Power Supply	DC power input supply (can access after removing the battery group)
Electrical specifications Frequency response	20Hz~20KHz
Earphone impedance	>32Ohm<1kOhm
Output consumption of loudspeaker	2X15mW/32Ohm
Wireless index Standard	IEEE Draft 2.0 802.11n
Radio frequency range	4.900-5.850GHz
Transmit power	15dBm
Antenna gain	2dBi
Specifications Output voltage of the battery	7.2V
Battery capacity	3200mAH
Continuous speech time	9 hours
Static standby time	13 hours
Longest charging time	3 hours
Color	Black
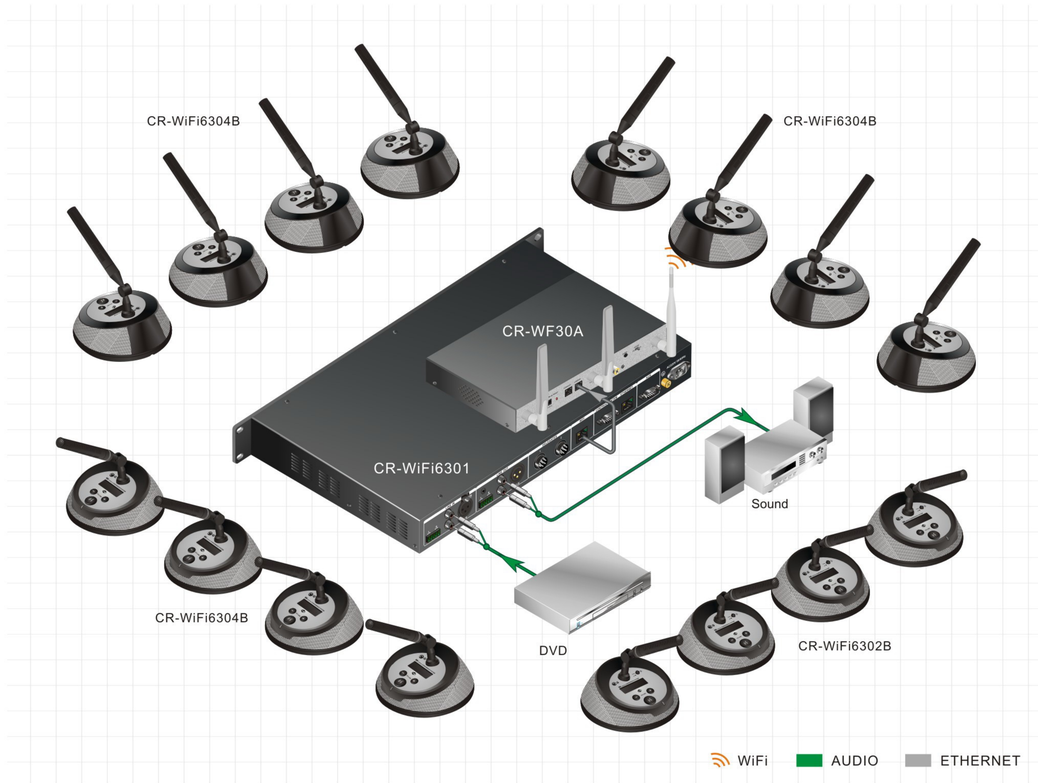
System connection diagram