

## ACENTO PROFILE ZOOM 650W 10/28°


Model 50-20



- Double condenser lenses
- Glass reflector
- Throw 15mts
- Beam angle 10° - 28°

### LAMPS

| LIFE CODE | ANSI CODE | W   | V   | BASE  |
|-----------|-----------|-----|-----|-------|
| T25/T18   | GCV/GVH   | 500 | 230 | GY9.5 |
| T27/T26   | GCK/GCT   | 650 | 230 | GY9.5 |
|           | FRK       | 650 | 120 | GY9.5 |




### Acento Profile Zoom 650w 10/28° MODEL 50-20

|   |                                       |
|---|---------------------------------------|
| L | 630mm. (24.80")                       |
| W | 290mm. (11.42")                       |
| H | 395mm. (15.58")                       |
|   | 7Kg. (15.43 Lbs.)                     |
|   | 300x300x650mm. (11.80"x11.80"x25.60") |

- These equipments comply with all applicable European directives and safety standards



### PHOTOMETRIC DATA

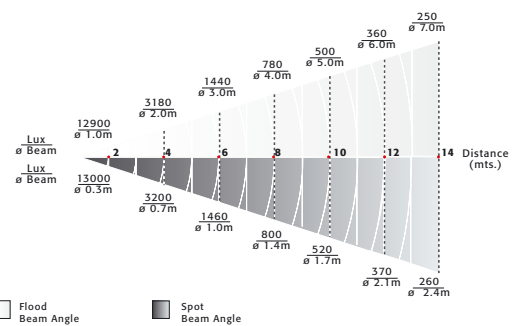

Flood Beam Angle Spot Beam Angle

### SUPPLIED WITH:

- Color frame
- Four beam shutters
- Gobo holder
- Quick access for lamp replacement
- Double microswitch interlock for safe relamping
- Easy access for lens cleaning
- GY9.5 lampholder
- 1.5m power supply cable

### ACCESSORIES

#### Acento Profile

