


This is a 4K60 4x4 HDMI matrix switcher which supports 4 HDMI2.0 inputs and 4 HDMI2.0 outputs with COAX audio de-embedded function. The resolution can up to 4K@60Hz, and other resolutions which are down than this. It also can support 3D, HDR, HDCP compliant. The control ways can be remote control, front buttons and WEB GUI(IP) control. It has been popularly used in the control center, medical and so on applications.

Features

- Supports HDMI20, HDCP2.2 compliant, up to 4Kx2K@60 Hz 4: 4: 4
- Supports HDR
- Supports real-time monitoring with the LCD screen
- Supports remote control, RS232 and TCP/IP
- Supports powerful EDID management
- Supports USB firmware upgrade
- Fixed chassis with 19" mountable design

Diagram

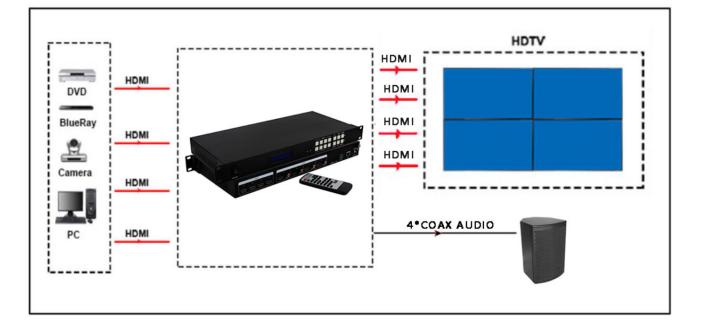

Specifications

Product Name	4K60 4x4 HDMI Matrix Switcher
Input	4*HDMI, 1*RS232,1*RJ45
Output	4*HDMI, 1*COAX
Protocol	Supports HDMI2.0, HDCP2.2, HDR and EDID management
Color space	Supports RGB444, YUV444, YUV422. And x.v.Color standard
Bandwidth	18GBPS
Output	Front buttons, remote, RS232, TCP/IP
Power Supply	DC12V3A
Dimension (WxHxD)	482x288x44(mm)
Weight	ЗКС
Operating Temperature	-10°C to 50°C
Storage Temperature	-25°C to 55°C