

ACENTO FRESNEL 650w. - 1000w. - 2000w.


Acento F 650w Model 50-27 | Acento F 1000w Model 50-30, Acento F 2000w Model 50-34



Acento Fresnel 650w Model 50-27

PHOTOMETRIC DATA


Acento Fresnel 650w 7° - 60° | with lamp CP89 650w 230v

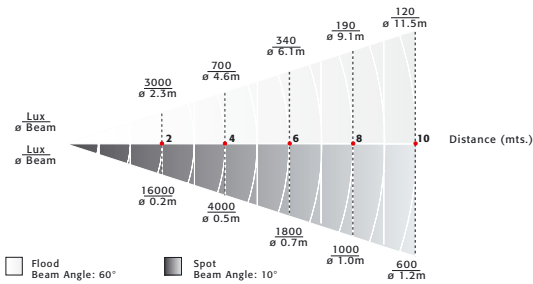

Acento Fresnel 1000w Model 50-30


PHOTOMETRIC DATA

Acento Fresnel 1000w 10° - 56° | with lamp CP70 1000w 230v Gx9.5



PHOTOMETRIC DATA


Acento Fresnel 2000w 10° - 70° | with lamp CP92 2000w 230v Gx9.5



LAMPS


LIF. COD.	BRAND CODE	W	V	LIFE HS.	USE IN MODEL
T26	GE T26	650	230	400	Fresnel 650w
T19	GE T19	1000	230	700	Fresnel 1000w
T29	GE T29	1200	230	400	Fresnel 1000w
CP92	GE CP92	2000	230	400	Fresnel 2000w
CP91	GE CP91	2000	230	400	Fresnel 2500w

ACENTO FRESNEL 1000w 50-30




L	315mm. (12.40")
W	290mm. (11.42")
H	235mm. (9.25")
kg	5kg. (11 Lbs.)
mm	350x260x320mm. (13.78"x10.24"x12.60")

ACENTO FRESNEL 2000w 50-34



L	370mm. (14.5")
W	348mm. (14.7")
H	328mm. (12.9")
kg	6kg. (13.20 Lbs.)
mm	400x340x320mm. (15.7"x13.3"x12.6")

ACENTO FRESNEL 650w 50-27



L	262mm. (10.32")
W	234mm. (9.21")
H	281mm. (11.07")
kg	3kg. (6.61 Lbs.)
mm	320x240x200mm. (12.60"x9.45"x7.87")

ACCESSORIES



- These equipments comply with all applicable European directives and safety standards



ACCESSORIES



- These equipments comply with all applicable European directives and safety standards

